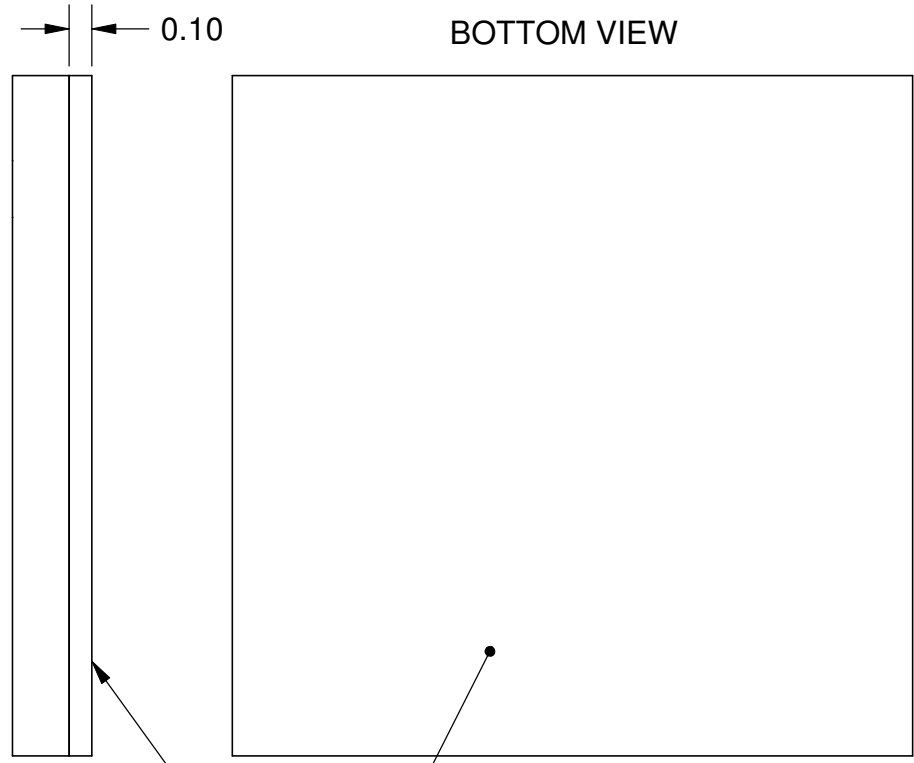
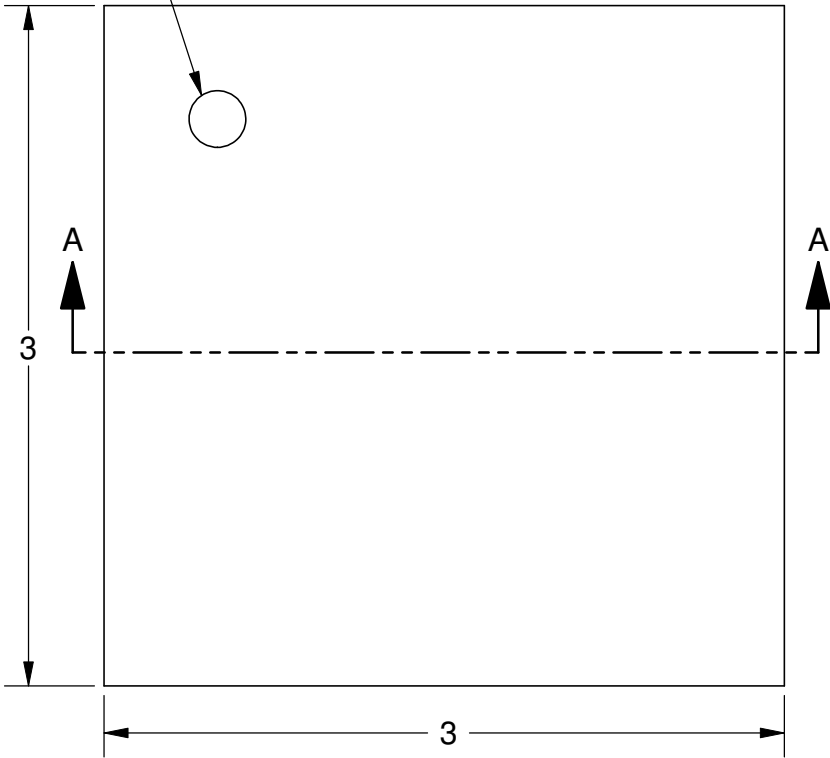


SIDE VIEW


BOTTOM VIEW

PIN 1 TOP VIEW





0.25
0.35

- Notes: (Unless Otherwise Specified).
- 1) MATERIAL:
 - A) LID: AL₂O₃ BLACK CERAMIC.
 - B) PREFORM: B-STAGE THERMOSET EPOXY.
 - 2) RECOMENDED CURE:
 - Step 1 - Preheat QFN at 75°C.
 - Step 2 - Cure at 125°C for 30 minutes.
 - Step 3 - Cure at 165°C for 60 minutes.
 - 3) STORAGE LIFE: 6 MONTHS @ 25°C.
 - 4) DIMENSIONS IN MM.



SECTION A-A

TOLERANCE UNLESS NOTED		APPROVALS		DATE		 Mirror Semiconductor™				
X.X	+/- 0.3	DRAWN J. Hines		10/31/2010						TITLE C-LID3W-BLACK 3X3mm CERAMIC LID B-STAGE EPOXY
X.XX	+/- 0.03	ENG				SCALE 30:1		SIZE A	DRAWING NO. 203063	REV A
X.XXX	+/- 0.003	MFG				DO NOT SCALE DRAWING		SHEET 1 OF 1		
ANGLES +/- 0.5°		THIRD ANGLE PROJECTION								
ALL DIMENSIONS IN		<input type="checkbox"/> INCHES <input checked="" type="checkbox"/> MILLIMETERS								
				REVISED						