

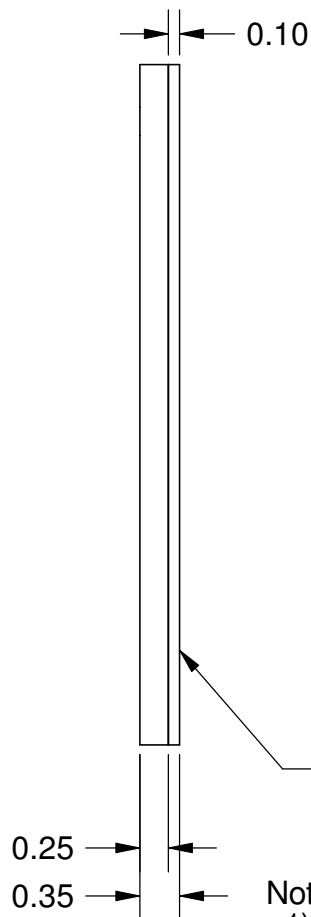


SIDE VIEW



BOTTOM VIEW

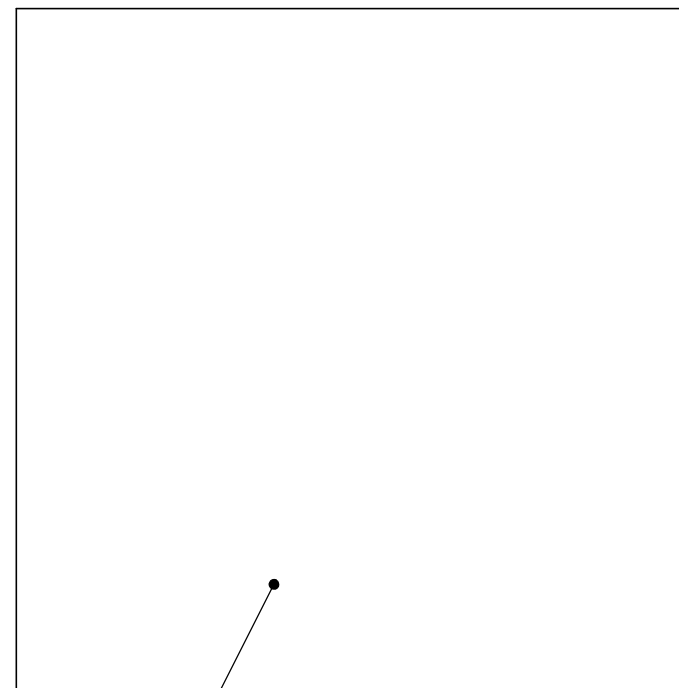


SECTION A-A

B-STAGE THERMOSET EPOXY

Notes: (Unless Otherwise Specified).

- 1) MATERIAL:
 - A) LID: Al_2O_3 BLACK CERAMIC.
 - B) PREFORM: B-STAGE THERMOSET EPOXY.
- 2) RECOMENDED CURE:
 - Step 1 - Preheat QFN at 75°C.
 - Step 2 - Cure at 125°C for 30 minutes.
 - Step 3 - Cure at 165°C for 60 minutes.
- 3) STORAGE LIFE: 6 MONTHS @ 25°C.
- 4) DIMENSIONS IN MM.

TOLERANCE UNLESS NOTED		APPROVALS		DATE		 Mirror Semiconductor™							
X.X	+/- 0.3	DRAWN J. Hines		10/31/2010						TITLE C-LID6W-BLACK 6X6mm CERAMIC LID B-STAGE EPOXY			
X.XX	+/- 0.03	ENG		MFG									
X.XXX	+/- 0.003	THIRD ANGLE PROJECTION		QA		SCALE	SIZE	DRAWING NO.	REV				
ANGLES +/- 0.5°		THIRD ANGLE PROJECTION		CUST		15:1	A	206063	A				
ALL DIMENSIONS IN		THIRD ANGLE PROJECTION		REVISED		DO NOT SCALE DRAWING		SHEET 1 OF 1					
<input type="checkbox"/> INCHES	<input checked="" type="checkbox"/> MILLIMETERS	THIRD ANGLE PROJECTION											