

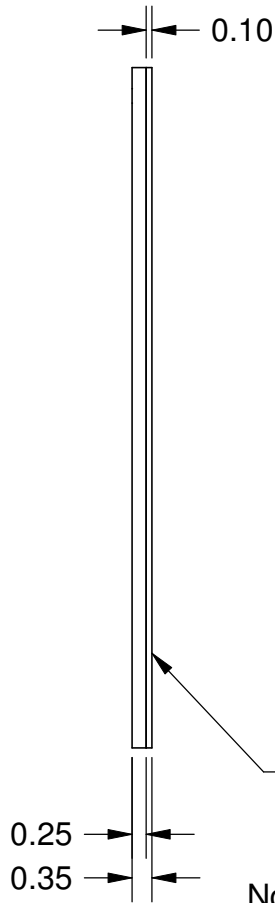


SIDE VIEW





BOTTOM VIEW

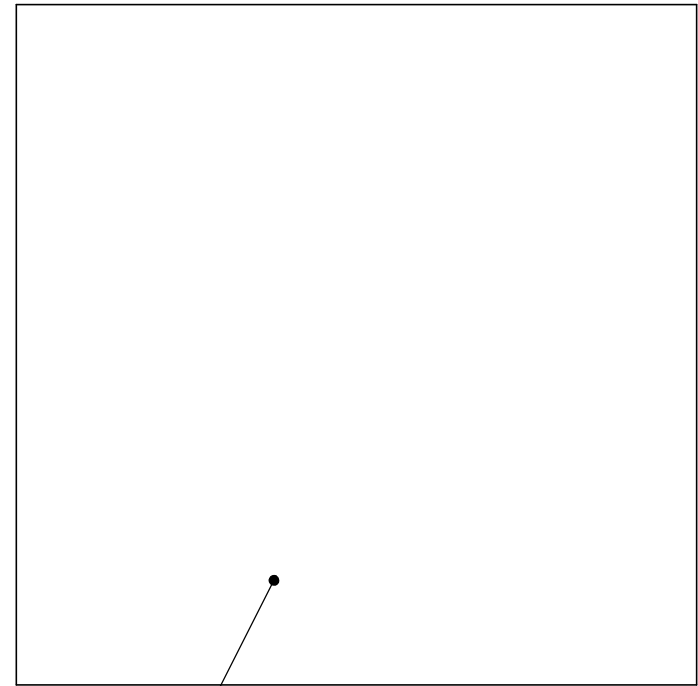

SECTION A-A

Notes: (Unless Otherwise Specified).

- 1) MATERIAL:
 - A) LID: Al_2O_3 BLACK CERAMIC.
 - B) PREFORM: B-STAGE THERMOSET EPOXY.
- 2) RECOMENDED CURE:
 - Step 1 - Preheat QFN at 75°C.
 - Step 2 - Cure at 125°C for 30 minutes.
 - Step 3 - Cure at 165°C for 60 minutes.
- 3) STORAGE LIFE: 6 MONTHS @ 25°C.
- 4) DIMENSIONS IN MM.

TOLERANCE UNLESS NOTED		APPROVALS		DATE	 Mirror Semiconductor™							
X.X	+/- 0.3	DRAWN J. Hines		10/31/2010					TITLE C-LID12W-BLACK 12X12mm CERAMIC LID B-STAGE EPOXY			
X.XX	+/- 0.03	ENG			SCALE 7.5:1		SIZE A					
X.XXX	+/- 0.003	MFG							DO NOT SCALE DRAWING			
ANGLES +/- 0.5° ALL DIMENSIONS IN <input type="checkbox"/> INCHES <input checked="" type="checkbox"/> MILLIMETERS		THIRD ANGLE PROJECTION 		QA	SHEET 1 OF 1							
				CUST								
				REVISED								