




TOP VIEW

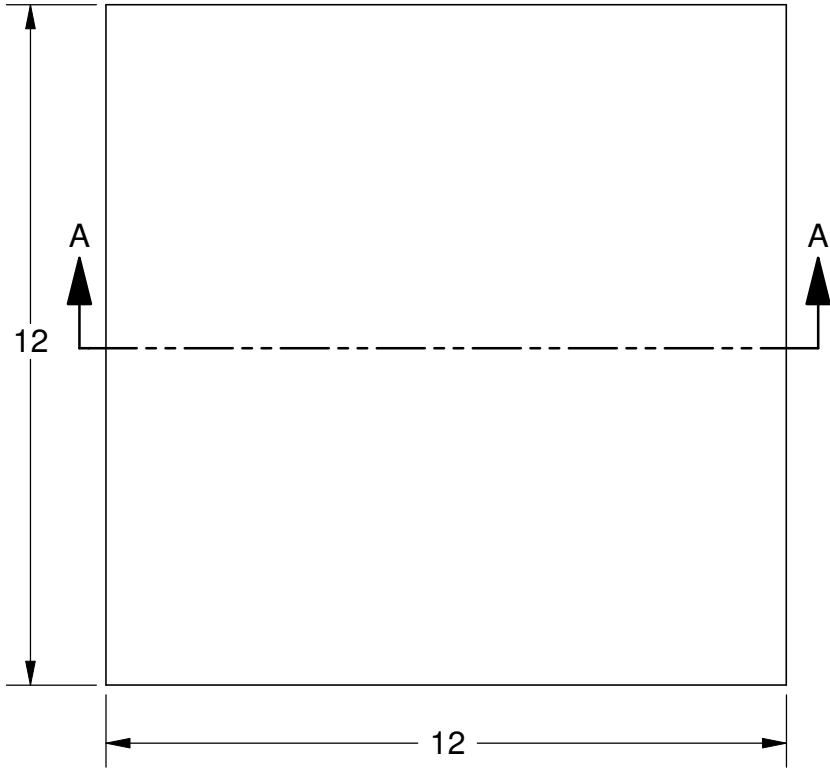


SIDE VIEW

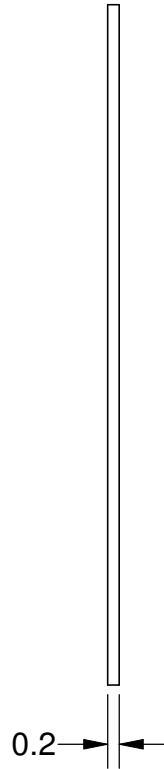

BOTTOM VIEW





SECTION A-A



Notes: (Unless Otherwise Specified).

- 1) MATERIAL:  
A) LID: ROGERS RO4003C = WHITE, BT = BLACK.  
B) PREFORM: NONE.
- 2) LID ATTACH:  
REMOVABLE: USE KAPTON TAPE OR EQUIVALENT.  
PERMANENT: USE EPOXY PER CUSTOMER CHOICE.
- 3) STORAGE LIFE: NO LIMIT @ 25 °C.
- 4) COLOR:  
STANDARD: WHITE OR BLACK (WITHOUT SOLDER MASK).  
WITH SOLDER MASK: RED, GREEN, YELLOW, & BLUE.
- 5) DIMENSIONS IN MM.

PART NUMBER TABLE		
COLOR	DWG	PART NBR
WHITE	212942	T-LID12W-WHITE
BLACK	212102	T-LID12W-BLACK
RED	212242	T-LID12W-RED
YELLOW	212442	T-LID12W-YELLOW
GREEN	212542	T-LID12W-GREEN
BLUE	212642	T-LID12W-BLUE

TOLERANCE UNLESS NOTED		APPROVALS		DATE	 <b>Mirror</b> Semiconductor™				
X.X	+/- 0.05	DRAWN MH		10/31/2010					
X.XX	+/- 0.01	ENG			TITLE T-LID 12X12mm ORGANIC LID				
X.XXX	+/- 0.005	MFG			SCALE 7.5:1		SIZE A	DRAWING NO. 212942	REV A
ANGLES +/- 0.5°		THIRD ANGLE PROJECTION			DO NOT SCALE DRAWING		SHEET 1 OF 1		
ALL DIMENSIONS IN		<input type="checkbox"/> INCHES <input checked="" type="checkbox"/> MILLIMETERS							
		QA CUST REVISED							